

PLATING ON EXTERIOR OF SLEEVE ONLY.  
FLASH ON INTERIOR OF SLEEVE ACCEPTABLE.

\* - LENGTH L IN 1/16 INCH INCREMENTS ±.010 (2 DIGITS)  
LENGTH L IN THOUSANDTHS OF AN INCH ±.005 (3 OR 4 DIGITS)

DIMENSION DATA (ALL DIMENSIONS BEFORE PLATING)

SIZE CODE	BOLT SIZE	A ±.005	DI DIA	DO DIA	L MAX
05	.1562	.312	.1550-.1565	.1720-.1730	.750
55	.1640	.325	.1620-.1635	.1790-.1800	.750
06	.1900	.380	.1880-.1895	.2045-.2055	1.000
08	.2500	.500	.2480-.2495	.2646-.2656	1.125
10	.3125	.620	.3105-.3120	.3271-.3281	1.187
12	.3750	.750	.3730-.3745	.3896-.3906	1.250
14	.4375	.875	.4355-.4370	.4521-.4531	1.375
16	.5000	1.000	.4980-.4995	.5146-.5156	1.500

MATERIAL AND FINISH DATA

CODE	MATERIAL	SPEC.	CONDITION	PASSIVATE
C	A-286 CRES	AMS 5525	AS FORMED	AMS 2700
D	A-286 CRES	AMS 5525	ANNEALED	AMS 2700

SURFACE FINISH


CODE	TREATMENT	SPEC.
N	NONE	
A	IVD ALUMINUM	MIL-DTL-83488
C	CAD PLATED	AMS-QQ-P-416 TYPE II CLASS 2

LUBRICATION DATA

CODE	LUBRICATION	SPEC.
NONE	NONE	
B	NONE	
L	CETYL ALCOHOL	MIL-L-87132

EXAMPLE PART NUMBER

JK5507 C 08 N 200 L

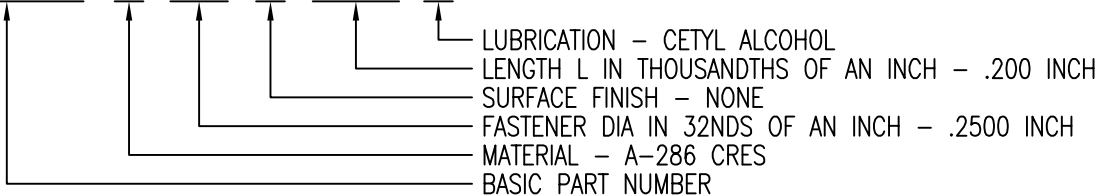

LUBRICATION - CETYL ALCOHOL  
LENGTH L IN THOUSANDTHS OF AN INCH - .200 INCH  
SURFACE FINISH - NONE  
FASTENER DIA IN 32NDS OF AN INCH - .2500 INCH  
MATERIAL - A-286 CRES  
BASIC PART NUMBER

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES AND TOLERANCES ARE AS SHOWN BELOW. DIMENSIONAL TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1982.

PROPRIETARY PARTS SHOWN IN THIS DRAWING ARE THE SUBJECT OF ISSUED UNITED STATES AND FOREIGN PATENTS AND PATENTS PENDING. UNAUTHORIZED REPRODUCTION AND/OR DISTRIBUTION OF THIS DRAWING IS SPECIFICALLY PROHIBITED.

**GLICK BOND**

CARSON CITY  
NEVADA 89706

HOLEMOD

APPROVALS	DATE
DRAWN <i>DAC</i>	30JUN05
CHECKED <i>DAC</i>	8MAR19
RELEASED <i>B Khodnegah</i>	9MAR19
REVISED <i>DAC</i>	8MAR19

TITLE			
SLEEVE, BOLT FIT, PROTRUDING TENSION HEAD			
SIZE	CAGE CODE	DWG. NO.	REV.
A	66530	JK5507	13
SCALE	4/1	8MAR19	SHEET 1 OF 1