

DIMENSION DATA

CODE	BOLT SIZE	ϕA	ϕDI	ϕDO	L MIN /2/	L MAX /3/	(HF)	(HS)
04	4,0	8,0	3,999 3,960	4,499 4,474	3	19	1,7	1,81
05	5,0	10,0	4,999 4,960	5,499 5,474	4	25	2,1	2,22
06	6,0	12,0	5,999 5,960	6,499 6,474	4	25	2,6	2,72
08	8,0	16,0	7,994 7,955	8,494 8,470	5	25	3,4	3,52
10	10,0	20,0	9,994 9,955	10,494 10,470	6	25	4,2	4,32
12	12,0	24,0	11,994 11,955	12,494 12,470	7	25	5,0	5,12

MATERIAL AND FINISH DATA

CODE	MATERIAL	SPEC.	CONDITION	PASSIVATE
C	A-286 CRES	AMS 5525	AS FORMED	AMS 2700 METHOD 1, TYPE 8

SURFACE FINISH

CODE	TREATMENT	SPEC.
N	NONE	
AC	ALUMINUM COAT	NAS4006


LUBRICATION DATA /6/

CODE	LUBRICATION	SPEC.
NONE	NONE	
L	CETYL ALCOHOL	AS87132

NOTES:

1. ALL DIMENSIONS BEFORE ALUMINUM COAT
- /2/ FOR LENGTH L < L MIN THE DO, DI, AND R DIMENSIONS ARE REFERENCE DIMENSIONS
- /3/ FOR L MAX DIMENSION, LENGTH IS L +0,50/-0,00
- /4/ 0,025 MAX BURR PERMISSIBLE ON INTERIOR AT END OF SLEEVE
- /5/ OPTIONAL ALUMINUM COAT ON EXTERIOR SURFACES (ALUMINUM COATING ON INTERIOR SURFACES PERMISSIBLE)
- /6/ CAUTION: CETYL ALCOHOL IS NOT RECOMMENDED FOR ADHESIVE BONDED SLEEVES

EXAMPLE PART NUMBER

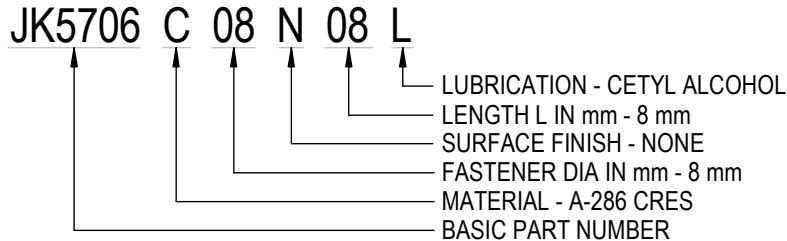

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS. DIMENSIONAL TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1982.

THE PARTS SHOWN IN THIS DRAWING ARE PROPRIETARY AND MAY BE THE SUBJECT OF ISSUED UNITED STATES AND FOREIGN PATENTS AND PATENTS PENDING. UNAUTHORIZED REPRODUCTION AND/OR DISTRIBUTION OF THIS DRAWING IS SPECIFICALLY PROHIBITED.



2151 LOCKHEED WAY
CARSON CITY, NEVADA 89706

TITLE
SLEEVE, BOLT FIT, 100 °
FLUSH TENSION HEAD, METRIC

DIN65430
METRIC
HOLEMOD

APPROVALS		DATE
DRAWN	GTP	26MAY22
CHECKED	<i>DD Carter</i>	26MAY22
RELEASED	<i>RDA</i>	26MAY22
REVISED	GTP	26MAY22

SIZE CAGE CODE
A 66530

DWG. NO.
JK5706

REV.
12

SCALE: 4:1

26MAY22 2JUN22

SHEET 1 OF 1