




## Swivel Eyebolt



The Jergens Swivel Eyebolt™ lifting product has a full swivel and pivoting action that allows for the flipping and turning of the part without unhooking. The patented tamper resistant design is ideal for permanent mounting on OEM applications or on molds, dies and fixtures.


- **Tamper Resistant Design**
- **Swivels 360°, Pivots 180°**
- **Eliminates Bending (of Eyebolt) Problem**
- **Forged, Oversized, One-Piece Lift Ring**
- **Rated at 5:1 Strength Factor**
- **Load Capacities to 4,000 lbs/2,000 kg**
- **Economically Priced**
- **Material: Alloy Steel, or 316 Stainless Steel**
- **Finish: Black Oxide, or Passivated (SS)**
- **3D Solid Models available in multiple formats from [www.jergensinc.com](http://www.jergensinc.com)**
- **Made in USA**
- **Magnetic particle inspected – alloy steel only. Liquid penetrant inspection for Stainless Steel version**

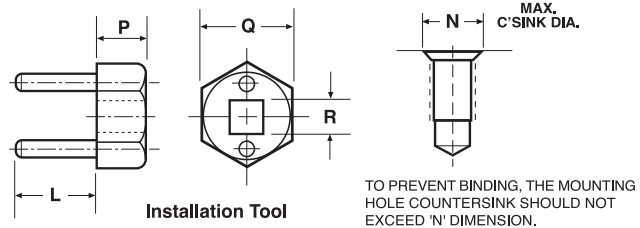

### Installation Tool Information


Installation Tool Part Number	Pin Length L	Head Thickness P	Hex Size Q	Square Drive R
47641	11/16	.55	15/16	1/4
47643	1 1/8	.65	1 1/4	3/8

Swivel Eyebolt Part No.	Installation Tool Part No.	Recommended Torque	Maximum Countersink Diameter N
47621	47641	7 ft. lbs	1/2
47622	47641	20 ft. lbs	5/8
47631	47641	7 ft. lbs	1/2
47632	47641	20 ft. lbs	5/8
47671	47641	10 Nm	13 mm
47672	47641	25 Nm	16 mm
47681	47641	10 Nm	13 mm
47682	47641	25 Nm	16 mm
47625	47643	35 ft. lbs	3/4
47626	47643	55 ft. lbs	7/8
47633	47643	35 ft. lbs	3/4
47634	47643	55 ft. lbs	7/8
47675	47643	50 Nm	19 mm
47676	47643	80 Nm	22 mm
47683	47643	50 Nm	19 mm
47684	47643	80 Nm	22 mm

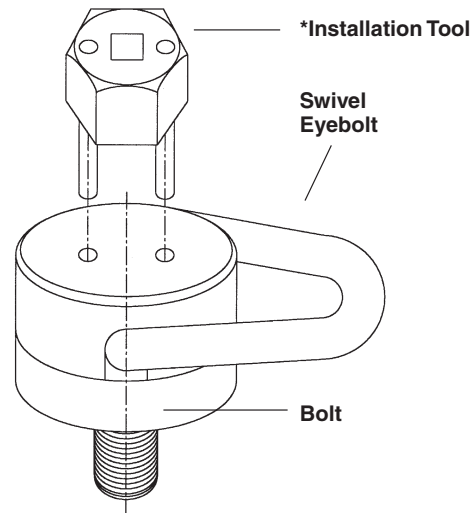



## Small Swivel Eyebolt

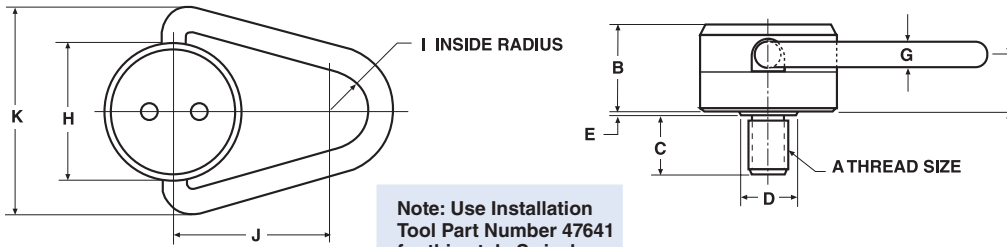

Note: Use Installation Tool Part Number 47641 for this style Swivel Eyebolt on page 28.

## Swivel Eyebolt

Part Number		Load Capacity (lbs)		Thread Size A	B	C	D	E	F	G	H	I	J	K
Alloy Steel	Stainless Steel	Alloy Steel	Stainless Steel											
47621	47631	1000*	500	3/8 - 16	1 3/32	9/16	3/4	3/64	45/64	5/16	1 3/4	1/2	2	2 5/8
47622	47632	2000*	1000	1/2 - 13	1 3/32	3/4	3/4	3/64	45/64	5/16	1 3/4	1/2	2	2 5/8


## Metric Swivel Eyebolt

Part Number		Load Capacity (kg)		Thread Size A	B	C	D	E	F	G	H	I	J	K
Alloy Steel	Stainless Steel	Alloy Steel	Stainless Steel											
47671	47681	500*	250	M10 x 1.5	27.8	14.6	19.1	1.2	17.9	7.9	44.5	12.7	50.8	66.7
47672	47682	700	350	M12 x 1.75	27.8	19.1	19.1	1.2	17.9	7.9	44.5	12.7	50.8	66.7

All dimensions are in millimeters.

\* Rated load may be reduced at 90° from vertical.

## Large Swivel Eyebolt

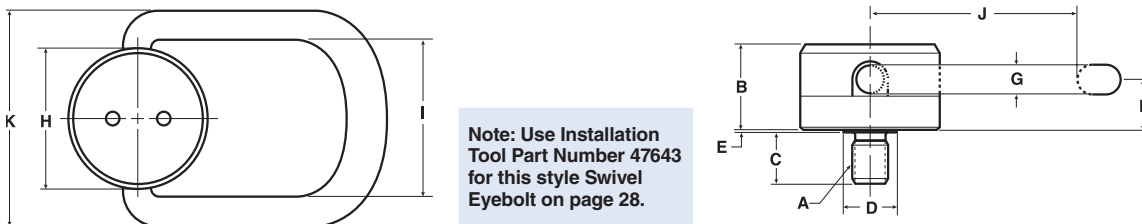

Note: Use Installation Tool Part Number 47643 for this style Swivel Eyebolt on page 28.

## Swivel Eyebolt

Part Number		Load Capacity (lbs)		Thread Size A	B	C	D	E	F	G	H	I	J	K
Alloy Steel	Stainless Steel	Alloy Steel	Stainless Steel											
47625	47633	3000	1500	5/8 - 11	1 33/64	15/16	7/8	1/32	57/64	1/2	2 1/2	2 3/4	3 1/2	3 13/16
47626	47634	4000	2000	3/4 - 10	1 33/64	1 1/8	1	1/32	57/64	1/2	2 1/2	2 3/4	3 1/2	3 13/16

## Metric Swivel Eyebolt

Part Number		Load Capacity (kg)		Thread Size A	B	C	D	E	F	G	H	I	J	K
Alloy Steel	Stainless Steel	Alloy Steel	Stainless Steel											
47675	47683	1500	750	M16 x 2.0	38.5	23.8	22.2	.8	22.6	12.7	63.5	70	93	97
47676	47684	2000	1000	M20 x 2.5	38.5	30.2	25.4	.8	22.6	12.7	63.5	70	93	97

All dimensions are in millimeters.

